

回る

Technical features



		DRIVE	Farmatat
Туре		Permanent magnets motor	Econology
Efficiency		80%	
Consumptions		Standby 4 W / Average per cycle 50 W	
Transmission	Gearless	Telescopic CO 700 - 1400 mm	Eagle belt
	Geared	Telescopic CO > 1400 mm	RPP5 belt
		Central opening doors	

ELECTRONIC MODULE

Туре	VVVF5 and VVVF6
Adjustable parameters via	PC / Console / Smartphone
Working signals available	From 12 V to 240 V AC/DC or with BUS CAN
Opening speed	Up to 1 m/s (Regulable)
Closing speed	Up to 0,6 m/s. Auto-adjustable directly with the panel weight
Re-opening	Integrated with auto-adjustable cycles

GENERAL FEATURES


Noise level	52,9 dB
Total weight	88 kg (C2 CO 900 mm)
Maximum moving mass	360 kg
Locking device	Available car door lock type

INSTALLATION

Pre-adjusted and tested to simplify the installation

Frontal concept, all parts within the sill projection, allows fixing directly to the front or by regulable range of brackets

COUPLING: SKATES AND CAR DOOR LOCK

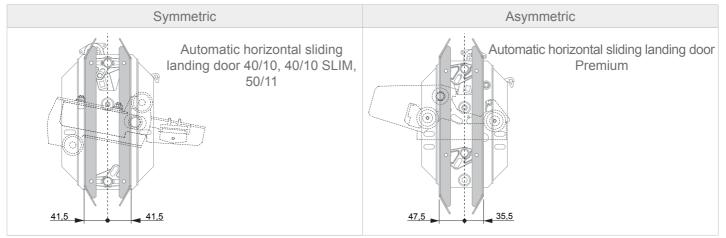





Sales contacts

De Huchtstraat 41 – 1327 EC Almere Telefoon: 036 30 33 750 Info@Imc-nl.nl www.Imc-nl.nl

IBAN: NL29 ABNA 0546 1812 36 BIC: ABNANL2A KvK-nummer: 61876593 BTW-nummer: 854527771B01

Fermator reserves the right to make changes to the specification of the products within this catalogue without prior notice.